

Model 3138-N 17"



3138-N 17" Powered Unwind

Printer Applicator

Powered Unwind

Model 3138-N 17"

The Label-Aire® **Model 3138-N Printer Applicator** makes print-and-apply labeling easier...the 17" (432 mm) Powered Unwind configuration helps to significantly reduce downtime making your business even more profitable.


The 3138-N 17" Powered Unwind printer applicator is every bit as advanced a workhorse as the standard 3138-N and has all the same key features. Advanced features include automatic setup with multiple programmable label pages for easy change-overs to labels of different sizes, rate compensation for improved label placement accuracy, and advanced user-configurable I/O connectivity. All these handy features greatly simplify setup and change-overs. Like all 3138 models, the 3138-N 17" Powered Unwind is just as tough as it is versatile and advanced. The increased roll capacity of the large 17" (432 mm) powered unwind is perfect for high-speed, heavy duty operation. The 3138-N's rugged stainless steel and anodized aluminum construction is corrosion resistant providing long-lasting durability and maintenance-free operation in the most hostile environments. Like all Label-Aire printer applicators, the 3138-N 17" Powered Unwind is compatible with any O.E.M. printer on the market.

Put this advanced workhorse printer applicator to work for you all day, every day. The Model 3138-N 17" Powered Unwind Printer Applicator is built to meticulous quality standards and designed to operate reliably under the most intense conditions.

3138-N 17" Powered Unwind <small>Advanced Features</small>	
17" (432 mm) powered unwind	Geared for high-speed, heavy duty operation.
Automatic setup	Includes multiple programmable label pages for easy change-overs to different label sizes.
Digital display	Remote operator control capability.
Flash memory	Allows easy download of system software updates.
Rate compensation (with optional encoder)	For improved label placement accuracy.
Advanced I/O	User-configurable for system output.
Heavy duty air cylinder	For 24/7 label application.
PLC outputs	User-configurable for system output.
3-color light stack	Warns of "end of label/ribbon" and "low ribbon". "Low label" is available.

barcode labeling, data collection, distribution, inventory control, product I.D., retail, shipping, supply chain management, warehouse

Powered Unwind

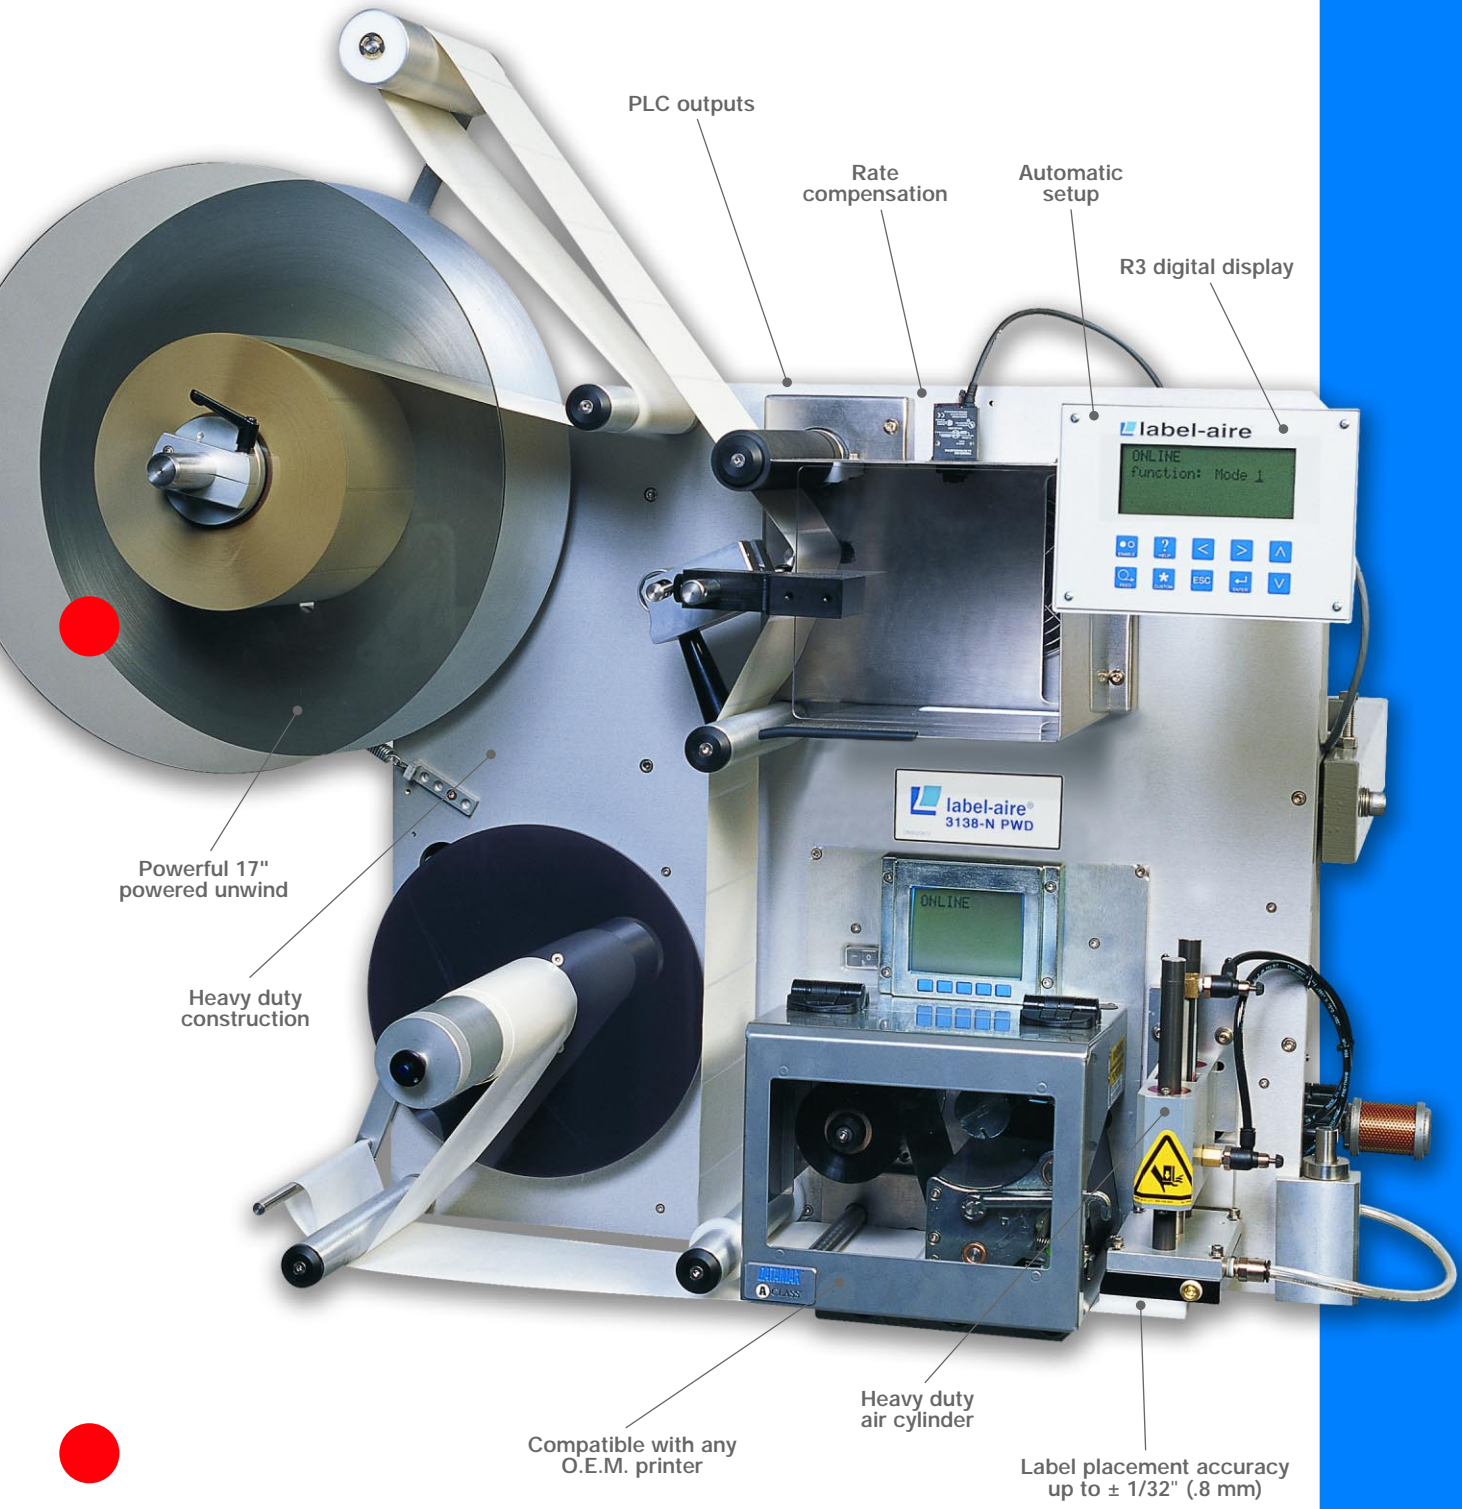

PLC outputs

Rate compensation

Automatic setup

R3 digital display

Powerful 17" powered unwind

Heavy duty construction

Compatible with any O.E.M. printer

Heavy duty air cylinder

Label placement accuracy up to $\pm 1/32"$ (.8 mm)

Model 3138-N 17" Powered Unwind Printer Applicator

www.label-air.com



3138-N 17" Powered Unwind Printer Applicator Specifications

Dimensions:

Height: 33.8" (859 mm)
Length: 39.9" (1013 mm)
Width: 24.2" (615 mm)

Weight:

Approx. 190 lbs. (86 kg)

Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)
Label Length: Up to 7" (178 mm)
(Printer dependent)

Dispense Speed:

Up to 12" (305 mm) per second
depending on printer and label size

Label Placement Accuracy:

+/- 1/32" (.8 mm)

Electrical:

115 Volts AC 60 Hz 5 Amps.
220 Volts AC 50 Hz 5 Amps.

Air:


4 cfm at 90 psi for most applications

Options:

All O.E.M. print engines
Label on pad detection
Dual Action Tamp (DAT) configuration*
90° swing tamp

Consult factory for additional options.

*Consult factory for availability.

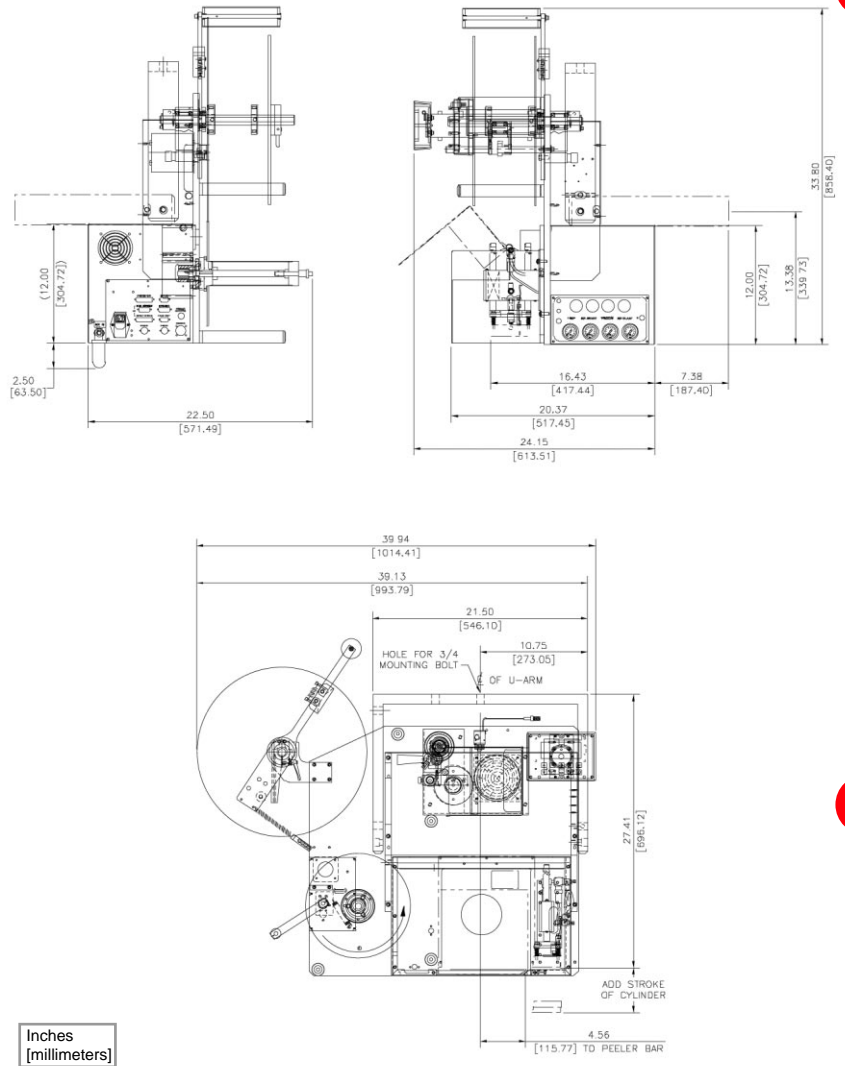

Distributed by:



Headquarters
550 Burning Tree Road
Fullerton, CA 92833 USA

o 714.441.0700
f 714.526.0300
e info@label-air.com
w www.label-air.com

Europe
Sjaellandsvej 27A
DK-9500 Hobro, Denmark

o +45 9657 0063
f +45 9657 0064
e info@label-air-as.com
w www.label-air-as.com