



# MegaPOS Lite

15" Value Fan-less  
Touch POS Terminal



MegaPOS Lite is a cost-effective fan-less POS terminal designed with all of the essential features. The optional peripherals supported by MegaPOS Lite allow additional expandability for different business needs.

Ansutek Commercial Ltd  
FreePhone: 0800 722 648  
FreeFax: 0800 722 649  
Email: [info@ansutek.co.nz](mailto:info@ansutek.co.nz)  
[www.ansutek.co.nz](http://www.ansutek.co.nz)



## Feature

### Built-in Customer Display for Cost Saving

Customer display is integrated on the console eliminating the need to purchase a pole display



### Low Power Consumption

Reduces electricity usage saving on monthly utility bills

### Integrated Rear Cover for Cable Management

Cabling for power cord and peripherals is hidden beneath the terminal keeping it out of sight and saving counter space




### Forward Facing Power Switch Status LED for HDD/ LAN & USB Port


Front I/O makes it easy for USB driver upload and mouse connection



## I/O Interface

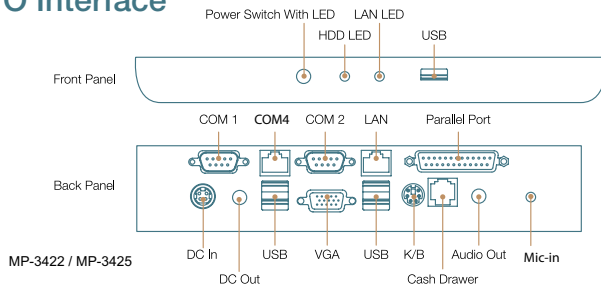

## Dimensions

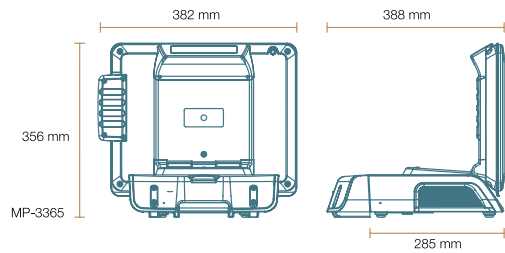

## Specifications

Model	MP-3432	MP-3435
Processor	Intel® Atom™ D525, 1M L2 Cache, 1.8Ghz	
System Memory	1 GB Standard, Maximum 4 GB (1 x 204 pins DDR3)	
Power Supply	90W (12V/7.5A) External Power Adaptor	
Storage Device	1 x 2.5" SATA HDD or SATA SSD	
Speaker	Internal Speaker 2W x 2	
Construction	ABS + SECC	
Housing Color	Charcoal + Silver	
<b>Touch LCD Display</b>		
Size / Resolution	12" TFT / 800 x 600	15" TFT LCD / 1024 x 768
Brightness (Backlight Type)	330 cd/m <sup>2</sup> (LED)	250 cd/m <sup>2</sup> (CCFL)
Touch Screen	5-Wire Resistive Touch	
<b>I/O Ports</b>		
Serial Port	3 x Internal: COM3 (Touch), COM5 (LCM), COM6 (Reserved) 3 x External : COM1, COM2 (DB9), COM4 (RJ45)	
USB Port	4 x Internal (1 MSR, 3 Reserved), 5 x External (4 Rear, 1 Front)	
Printer Port	1 x Bi-directional Parallel Port	
Cash Drawer Port	1 x RJ11 (12V)	
Keyboard / Mouse	1 x PS/2	
LAN Port	1 x RJ45 Giga LAN	
PCI Slot	1 x Mini PCI-e (Internal)	
Video Port	1 x VGA	
Audio Port	1 x Line-out, 1 x Mic-in	
DC Output	1 x 12V DC Jack 2.5 mm	
<b>OS Supported</b>		
Windows	Windows XP, Windows XPE, POSReady 2009, Windows 7	
Linux	Ubuntu 8.04 LTS	
<b>Physical Dimensions</b>		
Dimensions (WxHxD)	326 x 356 x 388 mm	382 x 356 x 388 mm
<b>Environment</b>		
EMI / Safety	CE, FCC Class A	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)	
Relative Humidity	10% ~ 90% (Non-condensing)	
<b>Optional Peripherals</b>		
Magnetic Stripe Card Reader	Integrated MCR Module (Single / Dual / Triple Track Selectable)	
2-in-1 / 3-in-1 Module	Integrated MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button	
2nd Display	Integrated 12.1" / 15" Pole-type LCD Display (Touch Screen Optional)	
Customer Display	Integrated in LCM or VFD / LCM Pole-type Customer Display	
Mounting Kit	Mounting Kit with Integrated Design	
Wireless LAN	Integrated 802.11 b/g/n Wireless Module	
2nd Storage Device	SATA DOM	

Ansutek Commercial Ltd - FreePhone: 0800 722 648 - FreeFax: 0800 722 649 - Email: [info@ansutek.co.nz](mailto:info@ansutek.co.nz) - [www.ansutek.co.nz](http://www.ansutek.co.nz)